



PCT/GB 2004 / 0 0 0 3 5 2



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 23 FEB 2004

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 12 February 2004



177

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport

South Wales
NP23 8QQ

31JAN03 E781330-1 002803
P01/7700 0.00-0302196.1

1. Your reference

M02B127/MW

2. Patent application number

(The Patent Office will fill in this part)

0302196.1

30 JAN 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

The BOC Group plc, Chertsey Road, Windlesham, Surrey, GU20 6HJ

Patents ADP number (if you know it)

884627002

If the applicant is a corporate body, give the country/state of its incorporation

England

4. Title of the invention

Medical Apparatus

5. Name of your agent (if you have one)

Michael Wickham

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

The BOC Group plc, Chertsey Road, Windlesham, Surrey, GU20 6HJ

Patents ADP number (if you know it)

35592004

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

| | |
|----------------------------------|-----------------|
| Continuation sheets of this form | 0 |
| Description | 4 |
| Claim(s) | 2 |
| Abstract | 1 |
| Drawing(s) | 3 + 3 <i>ph</i> |

10. If you are also filing any of the following, state how many against each item.

| | |
|---|------------|
| Priority documents | 0 |
| Translations of priority documents | 0 |
| Statement of inventorship and right to grant of a patent (<i>Patents Form 7/77</i>) | 0 |
| Request for preliminary examination and search (<i>Patents Form 9/77</i>) | 1 <i>✓</i> |
| Request for substantive examination (<i>Patents Form 10/77</i>) | 0 |
| Any other documents (<i>please specify</i>) | 0 |

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

Michael Wickham

29 January 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Michael Wickham
(01276) 477222

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

MEDICAL APPARATUS

The present invention relates to medical apparatus and cannula for delivering a breathable gas mixture to a patient.

It is known to administer oxygen to a patient so as to facilitate their breathing.

It is also known to deliver helium/oxygen gas mixtures to a patient with breathing difficulties to reduce airway resistance and improve lung ventilation. Known methods of delivery utilise one or more cylinders of gas. Each cylinder has associated with it a two stage pressure regulator to reduce the pressure of the gas from a high storage pressure (typically in the order of 200 bar) to near atmospheric pressure. The gas flows through relatively wide diameter tubing to an administration device, for example a nasal cannula. The gas is administered to the patient at room temperature.

It is an aim of the present invention to provide an improved apparatus for delivering a breathable gas mixture including helium to a patient.

According to the present invention there is provided a nasal cannula for delivering a breathable gas mixture comprising helium and oxygen to a patient, the nasal cannula comprising a length of high pressure narrow bore tubing having a proximal end region for connection to a high pressure source of the breathable gas mixture and a distal end region connected to at least one nasal administration device, wherein the nasal administration device or the distal end region of the tubing has at least one orifice for the expansion of the breathable gas mixture.

The invention also provides apparatus for administering a breathable gas mixture comprising helium and oxygen including means for supplying the breathable gas mixture at a high pressure and a nasal cannula according to the invention.

The nasal cannula and apparatus according to the invention offer the following advantages. First, the requirement for plural stage gas regulation to reduce the supply pressure to near atmospheric pressure is eliminated. Typically, a single stage regulator is used to supply the breathable gas at a pressure in the range of 100 to 300 bar. At such high supply pressures, the cannula tubing need only have a narrow bore. Therefore, unsightly wide bore tubing is avoided.

The breathable gas mixture is preferably a helium-oxygen mixture containing from, say, 20 to 30% by volume of oxygen (and hence 70 to 80% by volume of helium). Every gas has a Joule-Thomson inversion temperature. Above the inversion temperature throttling of the gas through an expansion orifice leads to its heating. Below the inversion temperature such throttling of the gas leads to its cooling. At ambient temperature oxygen is cooled on being expanded, but helium is warmed. The pressure at which the cannula receives the breathable gas and the composition of the mixture may thus be selected to give a desired degree of warming to the gas mixture on expansion through the said orifice. Indeed, an inhaled gas at close to the ideal tracheal temperature of the human body can be formed. Such a temperature facilitates a patient's breathing.

The breathable mixture of helium and oxygen may be stored at the desired high pressure in a gas cylinder.

The high-pressure tubing may be coiled.

The high-pressure tubing may be of a ductile metal or alloy, for example a cupro-nickel alloy.

The high pressure tubing may be surrounded by a protective sheath. The protective sheath may be of plastic material.

The nasal administration device may be a device defining a nasal prong or pair of nasal prongs.

An embodiment of the invention will now be described by way of example, reference being made to the Figures of the accompanying diagrammatic drawings in which:

Figure 1 is a schematic view of an apparatus for delivering a breathable gas mixture under pressure to a patient according to the present invention;

Figures 2a and 2b are schematic details of a coiled high pressure line forming part of the apparatus of Figure 1; and

Figure 3 is a schematic detail of an end of a coiled high pressure line terminating at a tubular nasal prong forming part of the nasal cannula forming part of the apparatus of Figure 1.

As shown in Figure 1, an apparatus 1 for delivering a breathable gas mixture including helium under pressure to a patient comprises a source of the gas mixture in the form of a cylinder 2 to which is mounted a single stage gas regulator 4 in a manner known per se. Preferably, the mixture contains 28% by volume helium, the remainder being oxygen.

A high pressure flexible braided hose 6 extends from the regulator 4 to a junction 8. A nasal cannula 7 is connected at its proximal end to the junction 8. The cannula 7 comprises a coiled high pressure tubing 12 and a nasal gas administration device 10.

Referring also to Figures 2a, 2b the coiled high pressure tubing 12 comprises a coiled high pressure cupro-nickel tube 14 having an internal diameter of between 10 and 15 thousandths of an inch enclosed within a tubular flexible protector sheath 16.

The coiled high pressure tubing 12 terminates at its distal end region in a tubular nasal prong or prongs 18 (see Figure 3) forming part of the nasal cannula 10 where it is formed with an expansion orifice 20. The tubular nasal prong 18 is formed with a

plurality of perforations 22 which allow the flow of the gas mixture from the cannula 10 in to the nasal passages of a patient.

In use, the gas mixture under high pressure leaves the cylinder 2 and passes through the regulator 4. The pressure at the outlet of the regulator 4 is preferably in the range 100 bar to 300 bar. The gas mixture passes via the high pressure flexible braided hose 6 to the cannula 7..

The gas mixture leaves the coiled high pressure tubing 12 of the cannula 7 through the expansion orifice 20 and is thereby expanded from the pressure in the range of 100 bar to 300 bar to a pressure that is approximately atmospheric pressure. The atmospheric pressure gas passes through the perforations 22 for passage in to the nasal cavities of a patient.

A particular advantage of the embodiment described above is that if a mixture of oxygen and helium is expanded the combined Joule Thomson effect of expanding both helium and oxygen is one of heating. The gas is thus raised in temperature by a few degrees Celsius. In the preferred mixture of 28% helium in oxygen the temperature of gas can be raised approximately 14°C above ambient yielding an inhaled gas which is close to the ideal tracheal temperature of the body. Thus the patient is provided with a slightly warmed gas with enhanced oxygen and easy breathability and the pressure of the gas mixture precludes any possibility of blockage by bodily fluids.

As modelled with HYSYS v 3.0.1 software using Peng Robinson with Lee-Kessler mixing rules a 28% by volume oxygen, 72% by volume helium mixture shows the following rise in temperature following an expansion to atmospheric pressure when the mixture is received at 20°C for expansion.

| | | | |
|------------------------------------|------|-----|-----|
| Upstream pressure (Bar) | 300 | 200 | 100 |
| Joule Thomson temperature rise (K) | 13.6 | 8.3 | 3.6 |

CLAIMS

1. A nasal cannula for delivering a breathable gas mixture comprising helium and oxygen to a patient, the nasal cannula comprising a length of high pressure narrow bore tubing having a proximal end region for connection to a high pressure source of the pressure breathable gas mixture and a distal end region connected to at least one nasal administration device, wherein the nasal administration device or the distal end region of the tubing has at least one orifice for the expansion of the breathable gas mixture.
2. A nasal cannula according to claim 1, wherein the high pressure narrow bore tubing is coiled.
3. A nasal cannula according to claim 1 or claim 2, wherein the high pressure narrow bore tubing is of a ductile metal or alloy.
4. A nasal cannula according to claim 3, wherein the alloy is a cupro-nickel alloy.
5. A nasal cannula according to any one of the preceding claims, wherein the high pressure narrow bore tubing is surrounded by a protective sheath.
6. A nasal cannula according to any one of the preceding claims, in which the nasal administration device defines a nasal prong or a pair of nasal prongs.
7. Apparatus for administering a breathable gas mixture comprising helium and oxygen including means for supplying the breathable gas mixture at a high pressure and a nasal cannula according to any one of claims 1 to 6.
8. Apparatus according to claim 7, wherein the said means includes a gas cylinder in which the breathable gas mixture is stored under pressure.

9. Apparatus according to claim 8, wherein the stored breathable gas mixture contains from 70 to 80% by volume of helium and from 20 to 30% by volume of oxygen.
10. Apparatus according to claim 8 or claim 9, wherein the stored breathable gas mixture is stored in the cylinder at a pressure in the range of 100 bar to 300 bar.
11. Apparatus according to any one of claims 8 to 10, wherein the stored breathable gas mixture contains 72% by volume of helium, balance oxygen.

ABSTRACT
MEDICAL APPARATUS

A nasal cannula 7 for inclusion in medical apparatus that delivers a breathable gas mixture of helium and oxygen to a patient comprises a length 12 of high pressure narrow bore tubing having a proximal end region for connection to a high pressure source, a cylinder 2, of the breathable gas mixture at a junction 8. The length 12 of tubing has a distal end region connected to at least one nasal administration device 10. The distal end region of the length 12 of tubing has an orifice for the expansion of the breathable gas mixture.

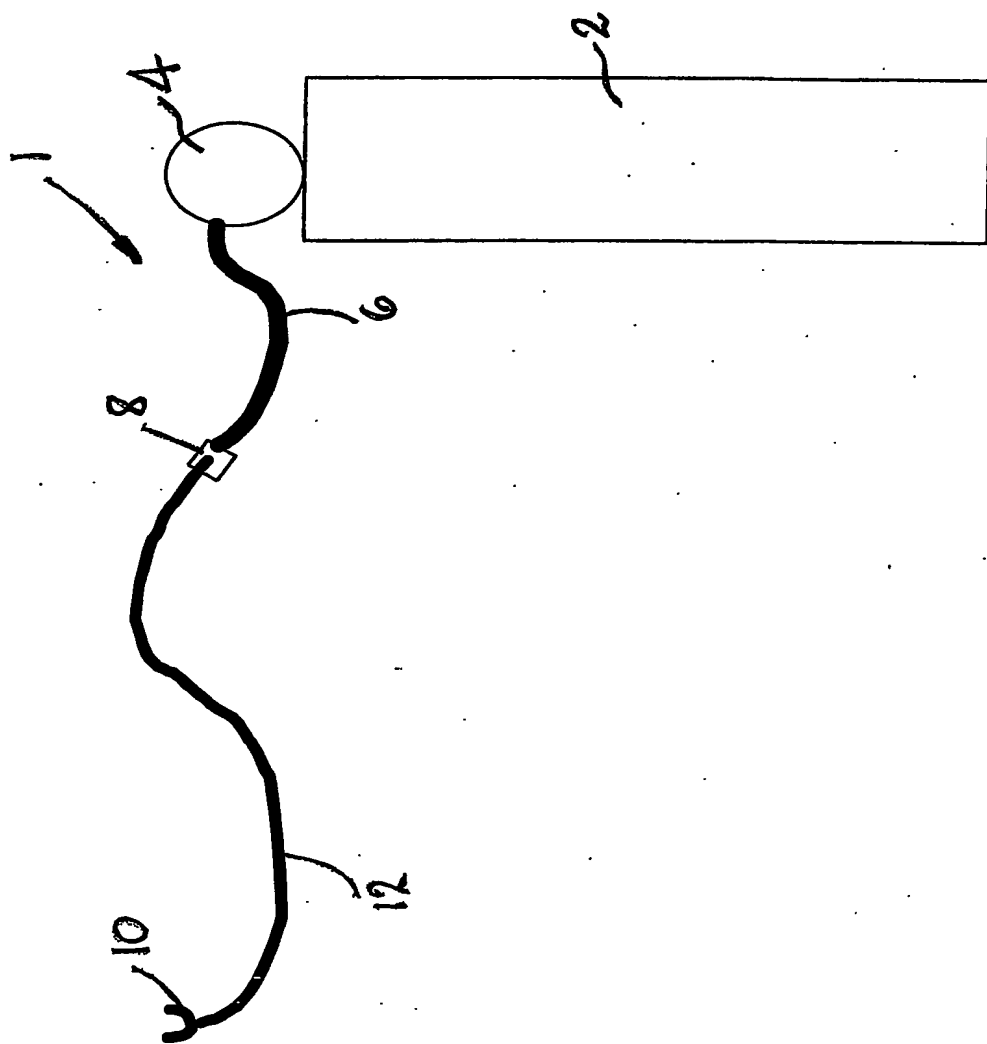


Figure 1

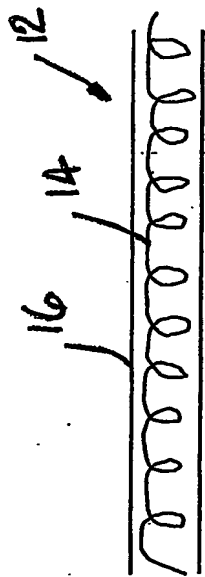


Figure 2a

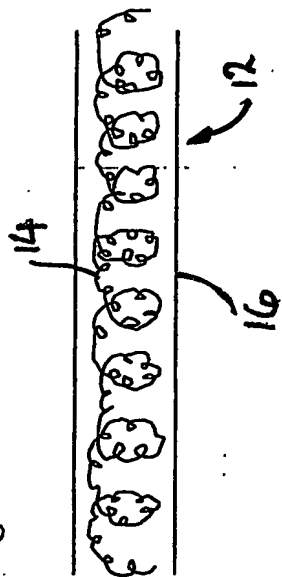


Figure 2b

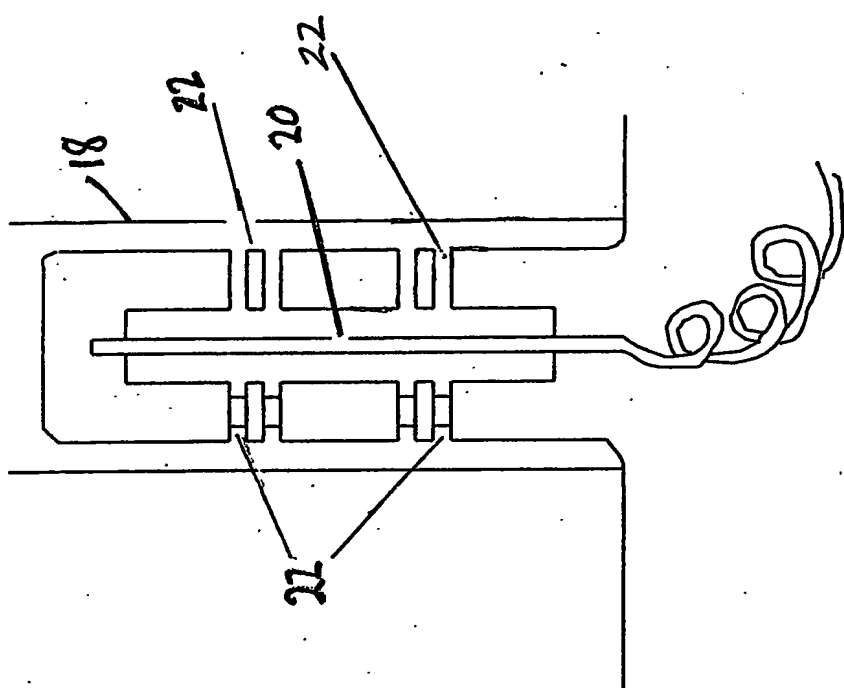


Figure 3

PCT Application
PCT/GB2004/000352

